

4 JANUARY 2010

①

MIDTERM 18 OR 20 JANUARY 1/20/2010

MAKEUP CLASS 1/22 ? 4-6 PM?


DIFFRACTION \rightarrow APPROXIMATIONS TO REALITY

USEFUL


(INCONVENIENT)

- (1) RAYLEIGH - SOMMERFELD \Rightarrow SPHERICAL WAVES, λ LSV
- (2) FRESNEL \Rightarrow PARABOLOIDAL WAVES (QUADRATIC PHASE), LSI
- (3) FRAUNHOFER \Rightarrow PLANE WAVE (LINEAR PHASE), λ LSV
Bi CONVENIENT

SPHERICAL SURFACES \Rightarrow PARABOLOIDAL (SAG FORMULA) $S(r) = \frac{r^2}{2R}$
QUADRATIC PHASE

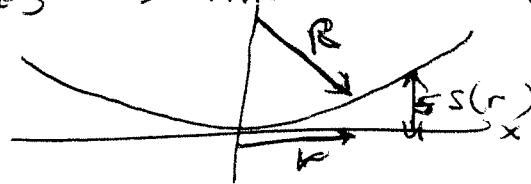

1/4/10 - (2)

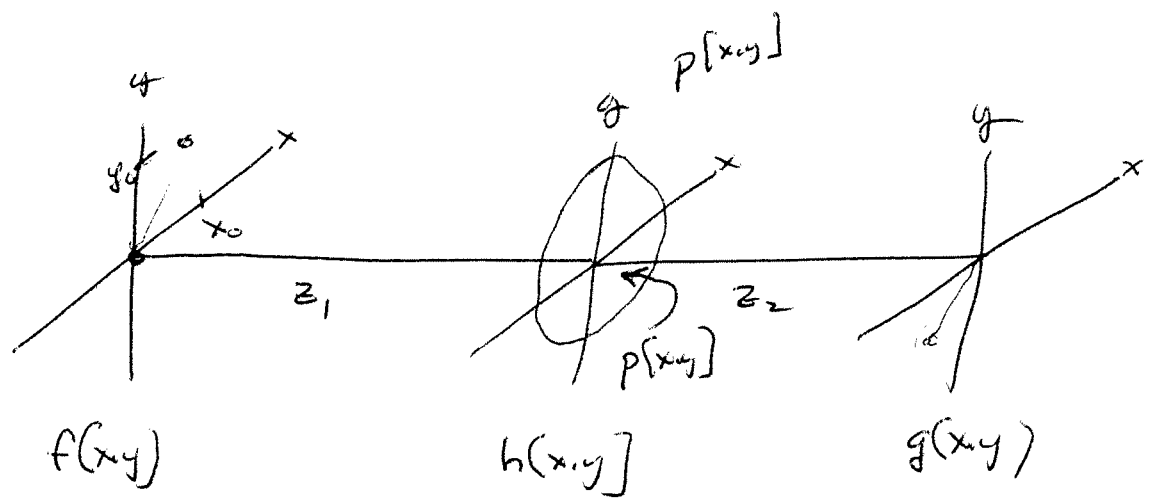

$f(x,y)$

$h(x,y)$

$g(x,y)$

f, λ_0

$\delta(x-x_0, y-y_0)$

$h[x-x_0, y-y_0]$

$$M_T = -\frac{z_2}{z_1}$$

$$\begin{matrix} \uparrow & \uparrow \\ M_T x_0 & M_T y_0 \end{matrix}$$

SINGLE WAVELENGTH \Rightarrow DEFINITE PHASE RELATIONSHIP \Rightarrow ~~$h(x,y) \propto \frac{1}{z_1 z_2} P\left[\frac{x}{z_1}, \frac{y}{z_2}\right]$~~
 DETERMINISTIC

$$h(x,y) \propto P\left[\frac{x}{\lambda_0 z_2}, \frac{y}{\lambda_0 z_2}\right]$$

$$H(\xi, \eta) \propto P[-\lambda_0 z_2 \xi, -\lambda_0 z_2 \eta]$$

RANDOM PHASE CASE

1/4/10 - (3)

$$\lambda_0 \longrightarrow \lambda_\mu \quad (\text{"MEAN" WAVELENGTH})$$

QUASI POLYCHROMATIC LIGHT

$$h(x,y) \propto |h(x,y)|^2 \geq 0$$




$$\underline{H[\xi,\eta] \propto H[\xi,\eta] * H[\xi,\eta]} \quad (\text{VIA WIENER-KHINTCHINE THEOREM})$$

SPHERES \Rightarrow PARABOLOIDS

1/4/10 (4)

DEVIATIONS FROM IDEAL

⇒ FABRICATION ERRORS

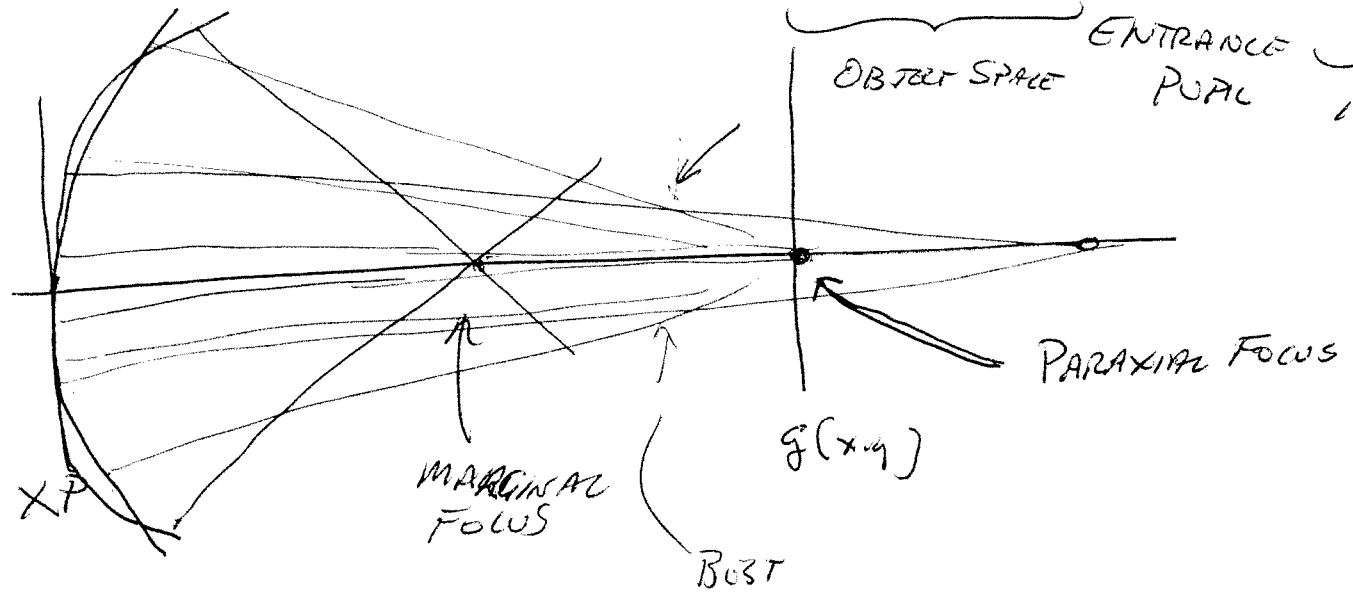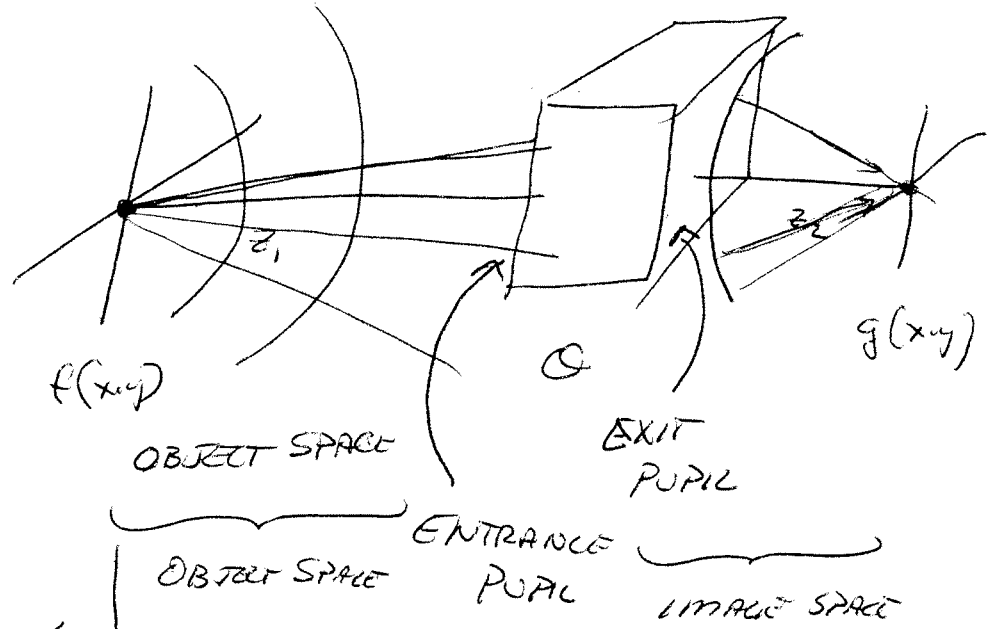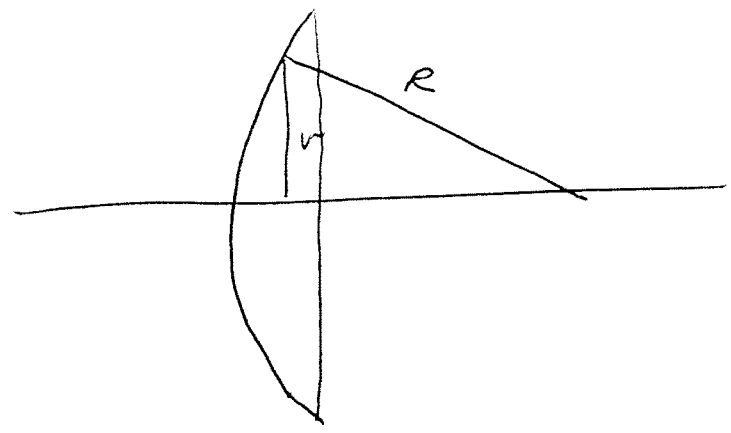



1/4/10 - 5

ABERRATIONS - DEVIATIONS FROM IDEAL "PERFORMANCE"

TBD


(1) CHROMATIC - VARIATIONS WITH λ

$$n(\lambda) = \frac{c}{v(\lambda)}$$

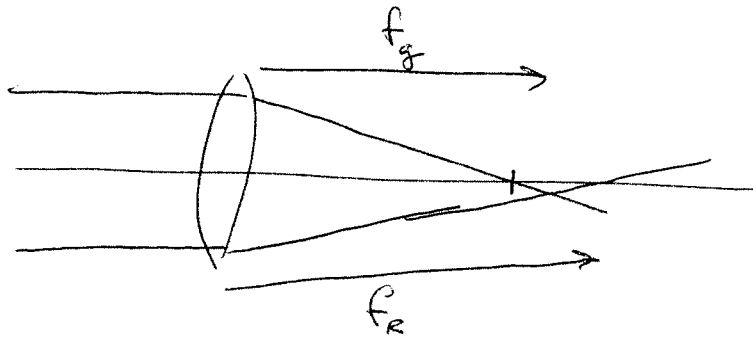
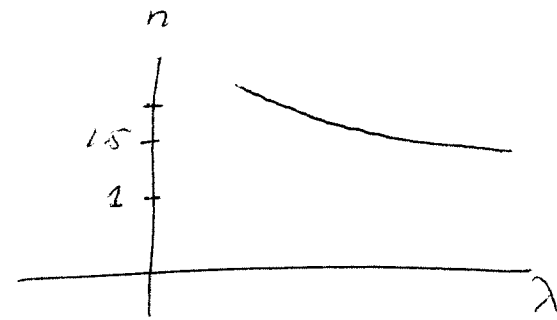


DISPERSION

(2) MONOCHROMATIC ABERRATIONS

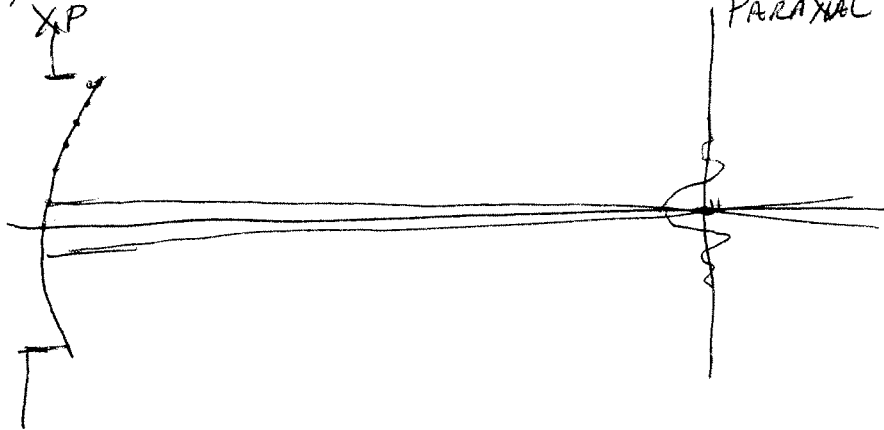

1/4/10 - (6)

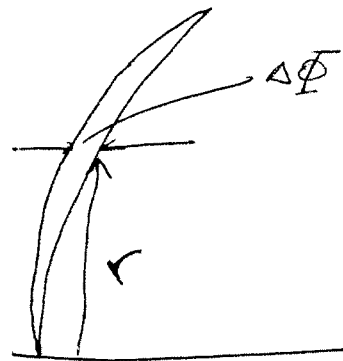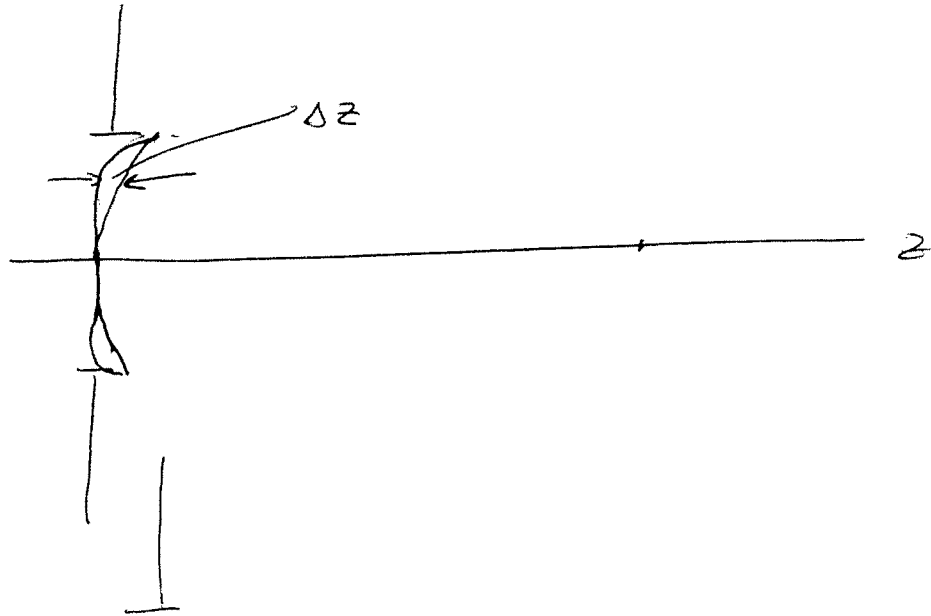

$$\Delta\Phi(x_0, y_0; x, y) \rightarrow \Delta\phi[r, \theta; r_0, \alpha]$$

IF XP IS CIRCULARLY SYMMETRIC

$\Rightarrow \theta - \alpha$ THAT MATTERS

$$\phi \equiv \theta - \alpha$$

PUPIL



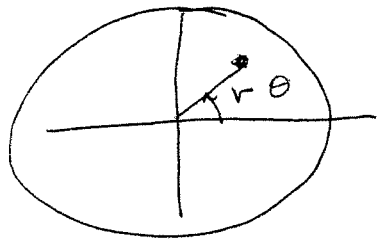


Image y_0

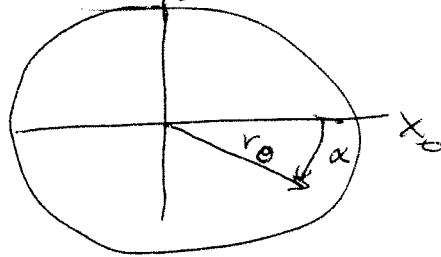

$$\Phi = 2\pi \frac{R}{\lambda_0}$$

R

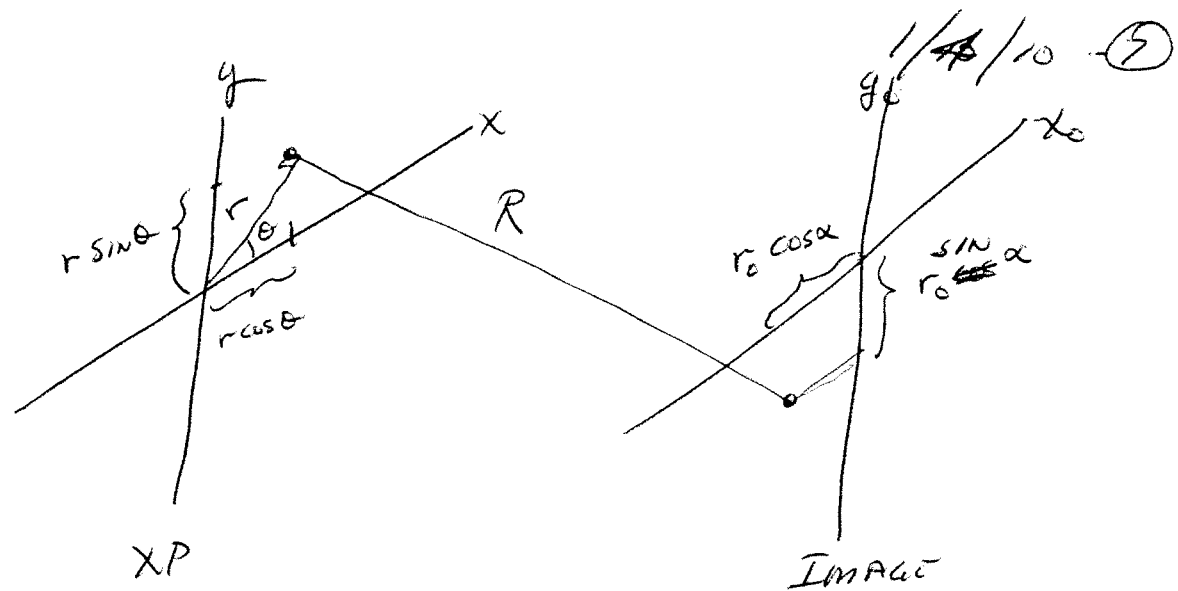

$$\xrightarrow{z_2; z}$$

$$\begin{aligned} R^2 &= z^2 + (r \cos \theta - r_0 \cos \alpha)^2 + (r \sin \theta - r_0 \sin \alpha)^2 \\ &= z^2 + \underbrace{r^2 \cos^2 \theta} + \underbrace{r_0^2 \cos^2 \alpha} + \underbrace{r^2 \sin^2 \theta} + \underbrace{r_0^2 \sin^2 \alpha} \\ &\quad - 2rr_0 (\cos \theta \cos \alpha + \sin \theta \sin \alpha) \\ &= z^2 + r^2 + r_0^2 - 2rr_0 \underbrace{\cos(\theta - \alpha)}_{\varphi} \end{aligned}$$

$$R = z \left(1 + \frac{r^2 + r_0^2}{z^2} - \frac{2rr_0}{z^2} \cos \varphi \right)^{1/2} \quad 1/4/10 \text{ (8)}$$

$$(1+u)^n = 1 + nu + \frac{n(n-1)}{2!} u^2 + \dots$$

$$= z \left(1 + \frac{1}{2} \left(\frac{r^2 + r_0^2}{z^2} - \frac{2rr_0}{z^2} \cos \varphi \right) - \frac{1}{8} \left(\frac{r^2 + r_0^2}{z^2} - \frac{2rr_0}{z^2} \cos \varphi \right)^2 + \dots \right)$$

TRUNCATE SERIES

CONSTANT
TERMS

QUADRATIC
DEFECTS

PISTON
ERROR

TIP-TILT
4

$$R \Rightarrow \bar{\phi} = \frac{2\pi}{\lambda} \cdot R \Rightarrow \left(\frac{2\pi}{\lambda} \cdot z + \frac{\pi}{\lambda z} r^2 + \frac{\pi}{\lambda z} r_0^2 - \frac{2\pi}{\lambda z} r r_0 \cos \varphi \right)$$

$$\Rightarrow + \frac{2\pi z}{8\lambda} \left(\left(\frac{r^2 + r_0^2}{z^2} \right)^2 - \left(\frac{2rr_0}{z^2} \cos \varphi \right)^2 + \frac{4rr_0(r^2 + r_0^2) \cos \varphi}{z^4} \right)$$

$$+ \frac{2\pi z}{4\lambda} \left(-\frac{r^4}{z^4} + \frac{r_0^4}{z^4} - \frac{2r^2 r_0^2}{z^4} - \frac{4r^2 r_0^2 \cos^2 \varphi}{z^4} + \frac{4r^3 r_0 \cos \varphi}{z^4} + \frac{4r r_0^3 \cos \varphi}{z^4} \right)$$

SEIDEL ABERRATIONS

1/4/10 - (9)

$$\Delta\bar{\phi}(r, r_0, \varphi) = \bar{\phi}_{IDEAL}(r, r_0, \varphi) - \bar{\phi}_{ACTUAL}(r, r_0, \varphi)$$

DESCRIBE $\Delta\bar{\phi}$ IN TERMS OF 10 COMPONENTS

(1) $\Delta\bar{\phi} = \frac{2\pi z}{\lambda_0}$ - CONSTANT PHASE DUE TO PROPAGATION

(2) $\Delta\bar{\phi} = \pi \frac{r^2}{\lambda_0 z}$ - QUADRATIC PHASE AT XP
DEFOCUS (ABERRATION?)
LSI

(3) $\Delta\bar{\phi} = \pi \frac{r_0^2}{\lambda_0 z}$ - QUAD PHASE AT IMAGE PLANE
PISTON ERROR (ABERRATION?)

(4) $\Delta\bar{\phi} = -2\pi \frac{r r_0}{\lambda_0 z} \cos\varphi$ BILINEAR PHASE TIP OR TILT
MOVES IMAGE TIP-TILT


SEIDEL ABERRATIONS

1/4/10 (10)

(5) SPHERICAL ABERRATION

$$\Delta\Phi = \frac{\pi z}{4\lambda_0} \cdot \left(-\frac{r^4}{z^4} \right) = -\frac{\pi r^4}{4\lambda_0 z^3} \propto r^4 \quad (\text{PUPIL HEIGHT})^4$$

LSI (IMAGE HEIGHT v_0 HAS NO EFFECT)

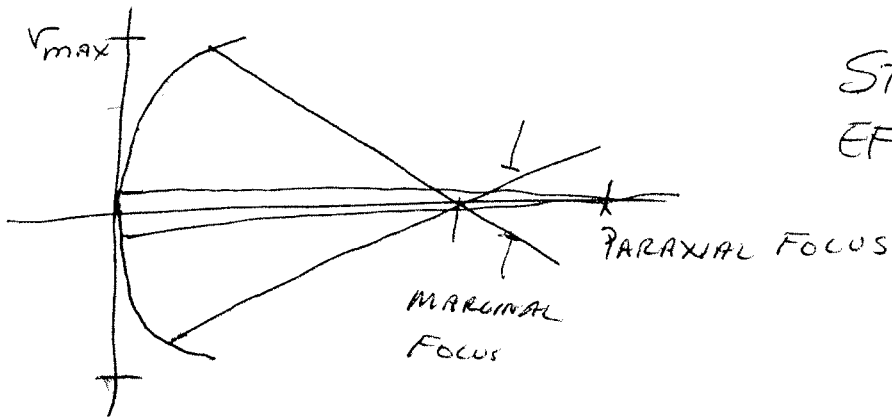

STOP DOWN LENS TO REDUCE
EFFECT OF SPHERICAL ABERRATION

